




OUTLAND
TECHNOLOGY
INC.

UNDERWATER LIGHTS MODEL UWL-100 & 200

UNDERWATER CAMERA OR WORK LIGHTS

Aug, 99

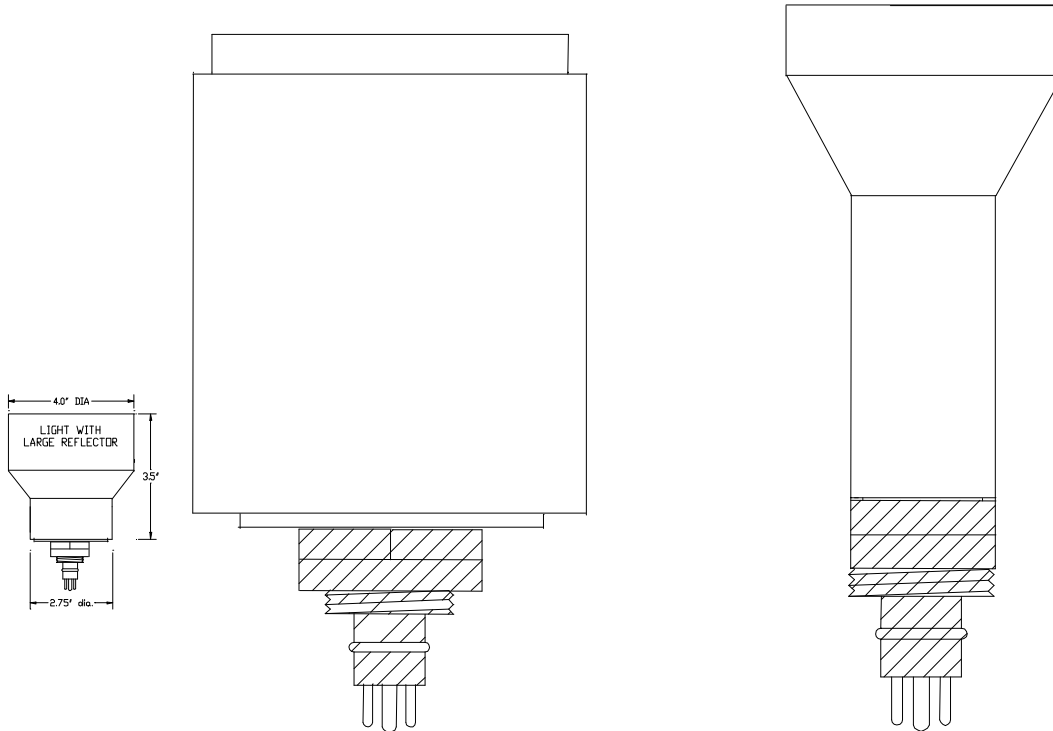

MODEL

UWL-100

UWL-200

MECHANICAL:

- | | | |
|----------------------|-----------------------------|------------------------------|
| 1. Diameter..... | 2.375 (60mm) | 1in to 1.6 in. max.(25-40mm) |
| 2. Length..... | 3.25 in (81mm) | 3.0 in. (75mm) |
| | (excluding connector) | |
| 3. Weight..... | (Dry) 1 lb. (.45kg) | 10.5 oz. (.3kg) |
| | (Wet) .8 lb.(.36kg) | 8 oz.(.23kg) |
| 4. Depth Rating..... | 3300 ft. (1000m) | 3300 ft. (1000m) |
| 5. Housing..... | Anodized AL. | 17-4, Stainless |
| 6. Port/G lobe..... | Pyrex | Borosilicate Glass |
| 7. Connector..... | SEM 3P-S 4 | GRE 3P-S4 |
| | Mating Connector.. RMG-3-FS | RMG-3-FS |

ELECTRICAL:

- | | | |
|-----------------|------------------|------------------|
| 1. Voltage..... | up to 120 V Max. | up to 120 V Max. |
| 2. Wattage..... | 250 max. | 150 Max. |
| 3. Bulb..... | Std. Q250cl/mc | std. Q150cl/mc |

OPTIONS:

- | | | |
|-------------------|---------------------------|----------------|
| 1. Reflector..... | Wide angle or Standard NA | |
| 2. Bulbs..... | 75 to 250 watt | 75 to 150 watt |
- (Specifications subject to change without notice.)

NOTE: Outland recommends the use of an Isolation transformer or Ground Fault Interrupter (GFI), with lamps above 30 Volts.