OUTLAND TECHNOLOGY
IMAGING SYSTEMS

0010710C

MODEL UWL-300
LOW VOLTAGE LIGHT

JAN.,05

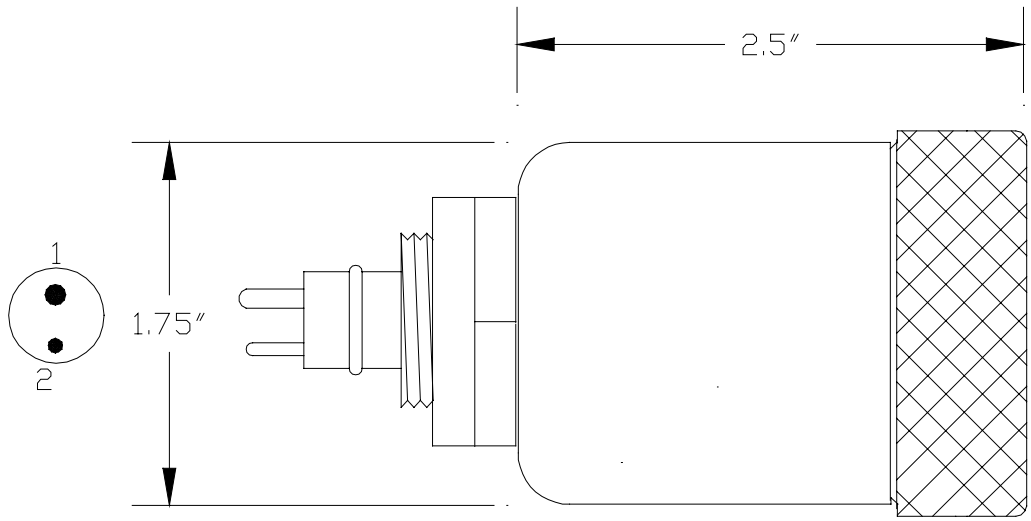

APPLICATIONS INCLUDE: UNDERWATER CAMERA OR WORK LIGHTS

MECHANICAL:

Diameter..... 1.75 in (44mm)
- Length..... 2.50 in (62mm) (excluding connector)
- Weight..... (Dry) .38 lb. (.17 kg) (Wet) .15 lb.(.06kg)
- Depth Rating..... 1000 ft. (300m)
- Housing..... White Delrin
- Port ..... Borosilicate Glass
- Connector..... XSG-2-BCL (Mating Connector.. RMG-2-FS)

ELECTRICAL:

- Voltage..... 12 V
- Wattage..... 35 WATTS
- Bulb..... MR-11
- Beam Angle..... 30 degrees

OPTIONS:

- PS-300 Power Supply, 120 VAC TO 12 VDC,Isolated power supply. Will run above light to a maximum of:

  350 ft. of 18 awg.
  600 ft. of 16 awg.
  1000 ft. of 14 awg.

  With no adjustment.

- Narrow, medium and flood bulbs available.

(Specifications subject to change without notice.)

38190 COMMERCIAL CT., SLIDELL, LA. U.S.A. 70458, PH (985)847-1104 FAX (984)847-1106