


Cable Reel

- **WATERPROOF IP68 SLIP RING DESIGN**
- **DURABLE CONSTRUCTION**
- **PORTABLE SUITCASE DESIGN WITH WHEELS**

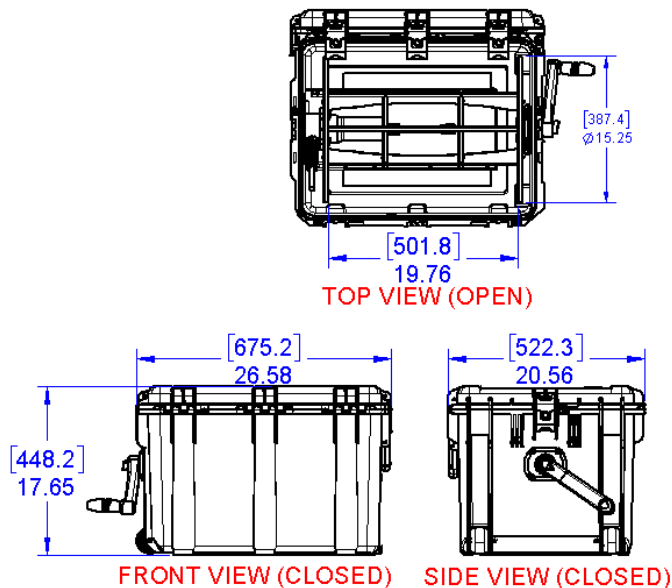

MECHANICAL SPECIFICATIONS:

External Width	20.56 in. (52.22 cm)
External Length	26.58 in. (67.51 cm)
External Height (Closed)	17.65 in. (44.83 cm)
Weight (without cable)	36 lbs. (16.33 kg)
Fixed Topside Whip Length	20 feet (6 m)
Waterproof rating	IP68
Operation Temps	-20°C to +80°C
Max Rotational Speed	250 rpm
Crank Handle	Included

REEL DIMENSIONS:

Traverse Length	19.76 in. (50.3 cm)
Fill Diameter	15.25 in. (38.74 cm)
Barrel Diameter	8.5 in. (21.6 cm)

SLIP RING ELECTRICAL SPECIFICATIONS:

Voltage Rating	400VDC
Power Current Rating	6A per conductor
Number of Power Conductors	5
Data Current Rating	2A per conductor
Number of Data Conductors	4 twisted pairs

REEL CAPACITY:

Tether Diameter	Max Tether Length
0.55 in (13.97 mm)	500 ft (152 m)
0.39 in (9.91 mm)	1200 ft (366 m)
0.30 in (7.62 mm)	2100 ft (640 m)

OPTIONS:

1. RL-750-1 (Outland Specific Connectors)
2. RL-750-2 (Blue Robotics Specific Connectors)
3. (Customer Specified Connector)