

- Complete Single Diver HD Video System
- Built-in Amron Communicator with Speaker
- Compact HD Camera
- LED Light, 2500 Lumens
- 1TB HDD DVR with built in Overlay
- Backwards compatible with older SD cameras



***PICTURES NOT TO SCALE

STANDARD SYSTEM INCLUDES:

- | | |
|---|--|
| <ul style="list-style-type: none"> • 1 EA. UWC-330/P: HD 1080P Camera • 1 EA. UWL-401: LED light • 1 EA. DHM-60: Bracket | <ul style="list-style-type: none"> • 1 EA. C-2303: 500 ft. cable • Radio Communications Cable NOT included • CON-3700/D: 15" 16:9 HD Monitor, HDD Recorder, Power Supply with variable light control & built in Amron Communicator with Speaker. All mounted in a weather-resistant shipping case. |
|---|--|

MODEL UWS-3710

COMPLETE HD UNDERWATER VIDEO SYSTEM

TECHNICAL SPECIFICATIONS

CAMERA: MODEL UWC-330/P



MECHANICAL:

Diameter..... 1.62 in. (41 mm)
Length (excluding connector)..... 5 in. (127 mm)
Weight air..... 0.63 lbs. (0.28 kg)
Weight in seawater..... 3.1 oz. (0.09 kg)
Depth Rating..... 6560 ft. (2000 m)
Housing Material..... Delrin
Port Material..... Acrylic

CAMERA PROPERTIES:

Image Device..... 1/2" Sony Sensor
Sensitivity..... 0.017 lux
Resolution..... 1080P
Lens..... 3.6 mm, F2.0
Focus..... Fixed
Horizontal FOV (in water)..... ~80°
Standard Form..... NTSC

LIGHT: MODEL UWL-401



MECHANICAL:

Weight air..... 0.48 lbs. (0.22 kg)
Weight in Seawater..... 0.18 lbs. (0.08 kg)
Depth Rating..... 6,560 ft. (2000 m)
Housing Material..... Anodized Aluminum


ELECTRICAL:

Input Voltage..... 24 VDC
Power..... 20 Watts

LIGHT PROPERTIES:

Light Output..... 1,100 lux @ 1 m (2,500 lumens) @ 3000 K

CABLE: MODEL C-2303

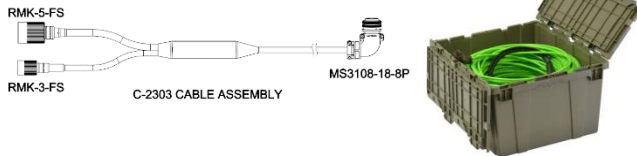

ELECTRICAL:

Conductors..... 16 ea. #22 awg; 1 RG-59 Coax

MECHANICAL:

Length..... 500 ft. (150m) Standard
Diameter..... 0.35" (8.9 mm)
Jacket..... Polyurethane (orange)
Breaking Strength..... 1,200 lbs. (540 kg)

CONSOLE: MODEL CON-3700/D



MECHANICAL:

Size..... 18.5" W x 14.5" D x 8" H (7.3 x 5.7 x 3.15 cm)
Weight..... 35 lbs. (16 kg)

ELECTRICAL:

Power..... 110-240 VAC; 50/60Hz.; 350 W max
Light Control..... Variable control 0-100%.
Monitor..... 15" ~1600nit, 16:9 HD LCD Color w/audio.
Safety..... Low voltage output to Diver
Connections..... Front panel connections for umbilicals
Recorder..... High Definition 1TB HDD DVR

OPTIONS:

CAMERA:

- Stainless Steel Camera Housing (UWC-330/SS)
- Pal Video Format (/E)
- Optional connectors

CABLE:

- User-specified cable lengths, 330ft & 500ft are standard lengths.
- C-2304 Cable (Replaceable whip at Diver)

BRACKET:..... HM-300 Helmet mount

LIGHT:..... UWL-400 LED Light
2,200 lux @ 1m (5,000 lumens) @ 3000 K
36 Watts

CONSOLE:

- Smart Camera Controller with Dive Timer (6200)
- Tender Headset (Amron 2401-28)
- DC Option (/DC) 300W true sign wave inverter