



- EQUIVALENT TO 300 WATT HALOGEN
- CAN OPERATE IN WATER OR AIR
- 24 VDC, 36 WATTS
- 5,000 LUMENS



**CAUTION: EXTREMELY BRIGHT
DO NOT LOOK DIRECTLY INTO LIGHT!**

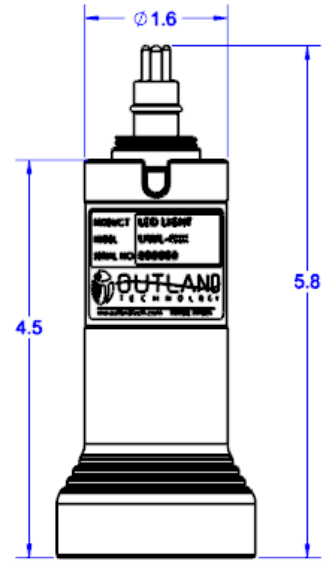

TOP VIEW



FRONT VIEW

APPLICATIONS INCLUDE: UNDERWATER CAMERA OR WORK LIGHTS

MECHANICAL:

Diameter.....	2.5 in. (63.5 mm)
Length (excluding connector).....	4.6 in. (117 mm)
Weight in air.....	0.67 lbs. (0.30 kg)
Weight in seawater.....	0.27 lbs. (0.12 kg)
Depth Rating.....	4000 ft. (1200 m)
Housing Material.....	Anodized Aluminum
Port Material.....	Acrylic

ELECTRICAL:

Input Voltage.....	24 VDC
Power.....	36 Watts
Analog Dimming.....	24VDC to 0VDC (0% to 100%)
Light Full on at 0 VDC control and Full off at 24 VDC	

LIGHT PROPERTIES:

Light Output.....	2200 lux @ 1 m (5000 lumens; Equiv. to 300-Watt Halogen)
Color Temperature.....	3000 K
Beam Angle.....	100 degrees

CONNECTOR:

Standard Connector.....	11-0004
Mate for Standard Connector.....	RMG-3-FS
1. Power (+)	
2. Power Return / Common	
3. 0-24 VDC Control	

OPTIONS:

- RS485 Digital dimming control
- Connector options

